



傳送器說明介紹

主程式連接畫面

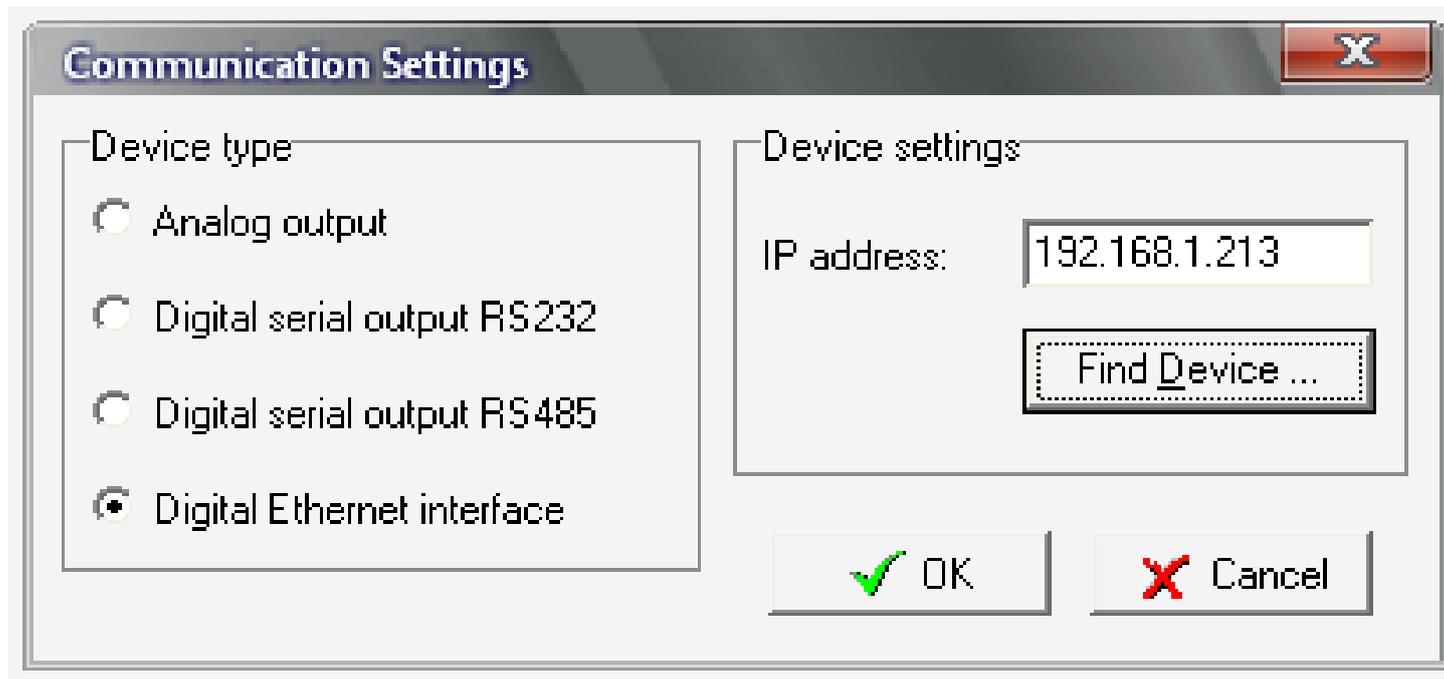

*可用 RS232、RS485、網路(用 ip 和電腦連接)

主程式瀏覽畫面

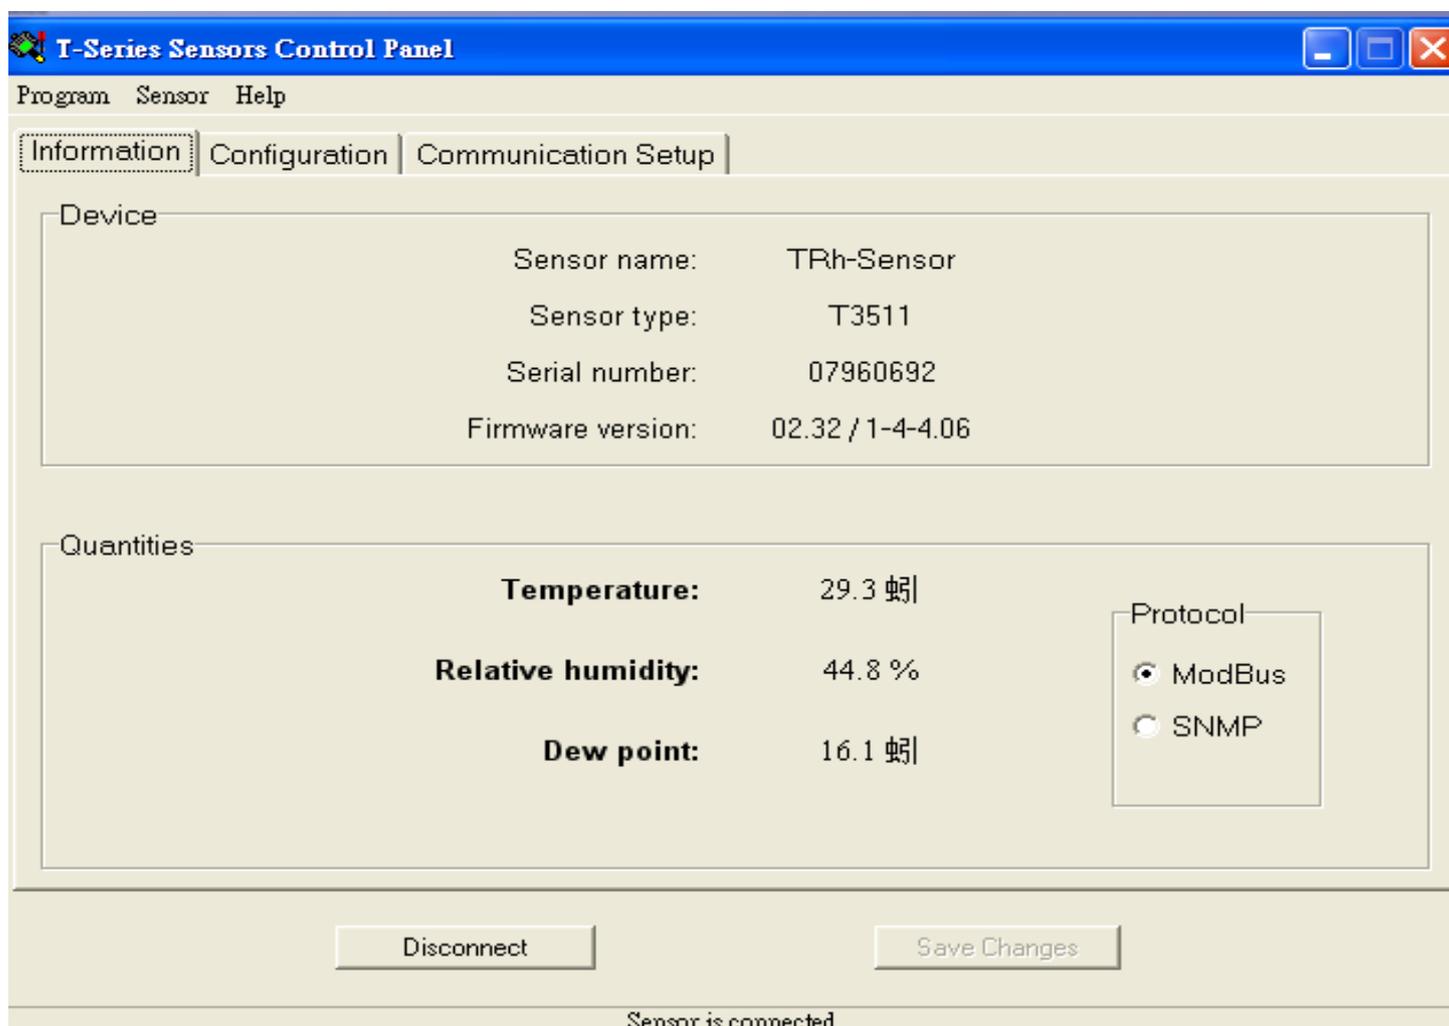

主程式設定畫面 1.

The screenshot shows the 'Configuration' tab of a web interface. At the top, there are three tabs: 'Information', 'Configuration', and 'Communication Setup'. The 'Configuration' tab is active. Below the tabs, there is a 'Computed quantity' dropdown menu set to 'Dew point'. To the right, a 'Display settings' box contains four checkboxes: 'Display on' (checked), 'Show temperature' (checked), 'Show relative humidity' (checked), and 'Show dew point' (unchecked). Below this, 'Atmospheric pressure for computed quantities' is set to '1013 hPa'. The 'Alarms' section is divided into three columns: 'Temperature', 'Relative humidity', and 'Dew point'. Each column has four rows for 'Upper limit', 'Lower limit', 'Hysteresis', and 'Time delay'. At the bottom, there are three buttons: 'Disconnect', 'Factory Defaults', and 'Save Changes'.

Alarms	Temperature	Relative humidity	Dew point
Upper limit:	300.0 °C	100.0 %	80.0 虳
Lower limit:	-200.0 °C	0.0 %	-50.0 虳
Hysteresis:	1.0 °C	1.0 %	1.0 虳
Time delay:	30 s	30 s	30 s


*.可設定警報高低範圍

主程式設定畫面 2.

The screenshot shows the 'Configuration' tab of a web interface, specifically the 'Communication Setup' sub-tab. It is divided into several sections: 'Global settings' (IP: 192.168.0.191, Gate IP: 0.0.0.0, Netmask: 0, Configuration password, Sensor name: TRh-Sensor), 'SNMP' (Enabled, Password for read: public, Password for write: private, Trap recipient IP 1, 2, and 3: 0.0.0.0), 'ModBus channel 1' (Enabled, Port: 502), 'WWW' (Enabled, WWW refresh: 60 s), 'History' (Storage time: 60 s), 'E-mail settings' (Sending warning e-mail: unchecked, Default e-mail sender: checked, SMTP IP: 0.0.0.0, Recipient 1, 2, 3, Sender: sensor@169.254.32.198), and 'Global time' (SNTP enabled: unchecked, SNTP IP: 0.0.0.0, UTC+ 0 min). A 'Send Test E-mail' button is also present.


*.可設定傳送器和電腦連接的各種方式，包含發送警報。

記錄連接畫面

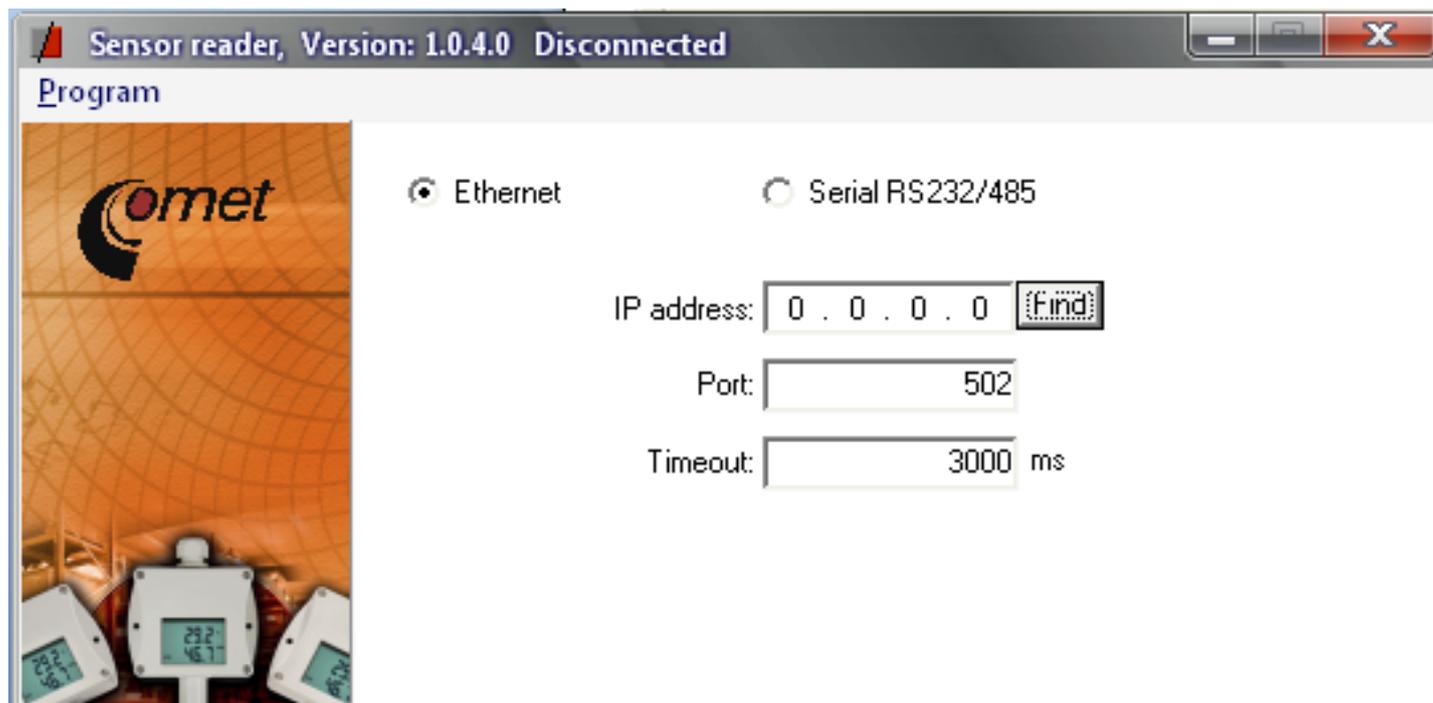


*可用 RS232、RS485、網路(用 ip 和電腦連接)

記錄即時瀏覽畫面

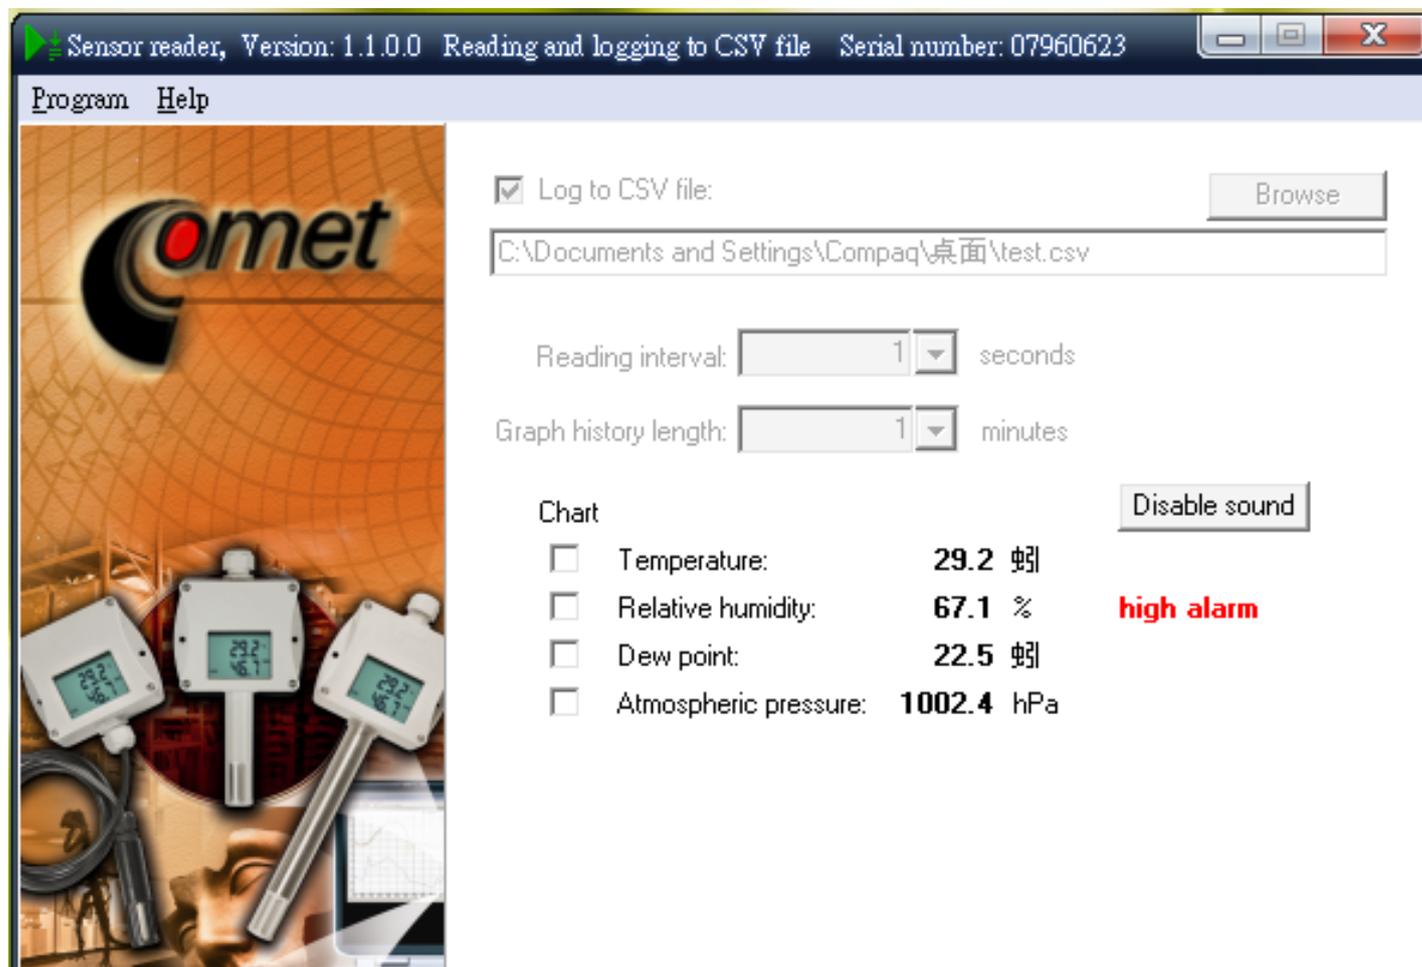

*可設定記錄區間,將傳送器所得數據用 excel 儲存,若有設定警報,超出時會有紅色字樣提醒

即時瀏覽曲線畫面

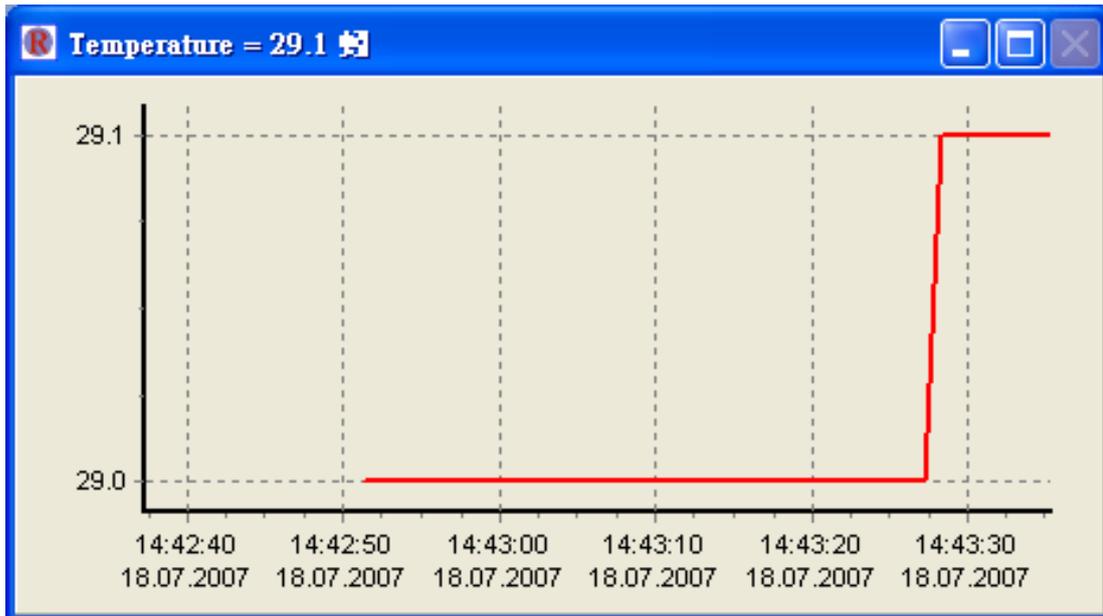

即時監看畫面



*可縮至工具列，即時監看。

記錄瀏覽

Microsoft Excel - 07960692

檔案(F) 編輯(E) 檢視(V) 插入(I) 格式(O) 工具(T) 資料(D) 視窗(W) 說明(H)

E13 29.1

	A	B	C	D	E	F	G	H	I	J
1	Sensor type	;	Serial number							
2	T3511	;	7960692							
3										
4	Local PC Date;		Local PC Time ;		Temperature ;		Relative hu;		Dew point (吋)	
5	2007/7/18;		下午 02:48:53 ;		29.1 ;		39.7 ;		14 ;	
6	2007/7/18;		下午 02:48:54 ;		29.1 ;		39.7 ;		14 ;	
7	2007/7/18;		下午 02:48:55 ;		29.1 ;		39.5 ;		13.9 ;	
8	2007/7/18;		下午 02:48:56 ;		29.1 ;		39.5 ;		13.9 ;	
9	2007/7/18;		下午 02:48:57 ;		29.1 ;		39.4 ;		13.9 ;	
10	2007/7/18;		下午 02:48:58 ;		29.1 ;		39.4 ;		13.9 ;	
11	2007/7/18;		下午 02:48:59 ;		29.1 ;		39.4 ;		13.9 ;	
12	2007/7/18;		下午 02:49:00 ;		29.1 ;		39.4 ;		13.9 ;	
13	2007/7/18;		下午 02:49:01 ;		29.1 ;		39.2 ;		13.8 ;	
14	2007/7/18;		下午 02:49:02 ;		29.1 ;		39.1 ;		13.7 ;	
15	2007/7/18;		下午 02:49:03 ;		29.1 ;		39.1 ;		13.7 ;	

*轉成 excel 的表現方式。

網頁瀏覽(網路型)

網址(D) <http://60.250.73.8/>

Google [Go](#) [34 blocked](#) [Check](#) [AutoLink](#) [AutoFill](#) [Send t](#)

 **Device: T3511**
Serial No: 07960692

Current values	Temperature history graph	Relative humidity history graph	Dew point history graph	History tables	About
--------------------------------	---	---	---	--------------------------------	-----------------------

Current measured values:

(Local PC time: 2007年9月4日 下午 04:02:14)

Temperature: 28.4 °C
Relative humidity: 50.8 %RH
Dew point: 17.3 °C

Alarms:

Temperature: no
Relative humidity: no
Dew point: no


 **Device: T3511**
Serial No: 07960692

Current values	Temperature history graph	Relative humidity history graph	Dew point history graph	History tables	About
--------------------------------	---	---	---	--------------------------------	-----------------------

Current temperature: 28.3 °C

(Local PC time: 2007年9月4日 下午 04:04:07)

Temperature history:

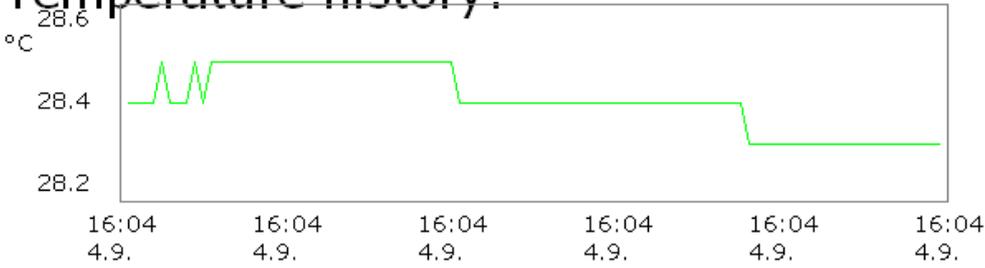

Time	Temperature (°C)
16:04 4.9	28.4
16:04 4.9	28.5
16:04 4.9	28.4
16:04 4.9	28.5
16:04 4.9	28.5
16:04 4.9	28.4
16:04 4.9	28.3
16:04 4.9	28.3


Temperature settings:

Alarm: no
upper limit: 32.0 °C
lower limit: 0.0 °C
hysteresis: 1.0 °C
time delay: 1 s
Storage interval: 0 s

Current relative humidity: 54.9 %

(Local PC time: 2007年9月4日 下午 04:05:30)

Relative humidity history:

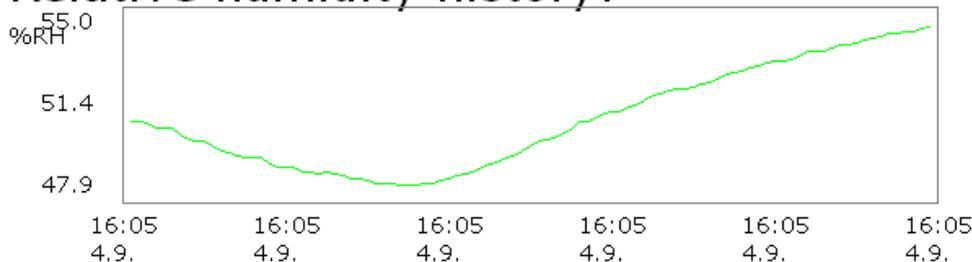

Relative humidity settings:

Alarm: no
 upper limit: **100.0 %RH**
 lower limit: **0.0 %RH**
 hysteresis: 1.0 %RH
 time delay: 1 s
 Storage interval: 0 s

Time:	Temperature:	Relative humidity:	Dew point:
4.9. 16:06	28.4	54.9	18.4
4.9. 16:06	28.4	55.1	18.5
4.9. 16:06	28.4	55.2	18.5
4.9. 16:06	28.4	55.3	18.5
4.9. 16:06	28.4	55.5	18.6
4.9. 16:06	28.4	55.5	18.6
4.9. 16:06	28.4	55.6	18.6
4.9. 16:06	28.4	55.7	18.7
4.9. 16:06	28.4	55.7	18.7
4.9. 16:06	28.4	55.8	18.7

(Local PC time: 2008年2月19日 上午 11:52:37)

Device : TRh-Sensor
Serial No : 07961502
現在溫度: 19.6 °C
現在溼度: 67.5 %RH
露點溫度: 13.5 °C
溫度警報: lo
溼度警報: hi

(Local PC time: 2008年2月19日 上午 11:52:38)

Device : TRh-Sensor
Serial No : 07961502
現在溫度: 19.6 °C
現在溼度: 67.5 %RH
露點溫度: 13.5 °C
溫度警報: lo
溼度警報: hi

(Local PC time: 2008年2月19日 上午 11:52:38)

Device : TRh-Sensor
Serial No : 07961502
現在溫度: 19.6 °C
現在溼度: 67.5 %RH
露點溫度: 13.5 °C
溫度警報: lo
溼度警報: hi

(Local PC time: 2008年2月19日 上午 11:52:38)

Device : TRh-Sensor
Serial No : 07961502
現在溫度: 19.6 °C
現在溼度: 67.5 %RH
露點溫度: 13.5 °C
溫度警報: lo
溼度警報: hi

*可用網頁的方式呈現，甚至能在一個視窗同時監控 1 個以上的傳送器，方便監控。